



**BEAMZ**  
**MADE**  
**EAZY**

150.581 150.588 V1.0

**BBP90**

**QUICK START GUIDE**




## CONTROL MENU

MENU		DESCRIPTION
<b>A001</b>	001-512	DMX address setting
<b>U.100</b>	000-100	Battery level indicator
<b>IRYE</b>	yE	Turn on the remote control function
	no	Turn off the remote control function
<b>0255</b>	000-255	Master dimmer 0-100%
<b>R255</b>	000-255	Red dimmer 0-100%
<b>G255</b>	000-255	Green dimmer 0-100%
<b>B255</b>	000-255	Blue dimmer 0-100%
<b>U255</b>	000-255	UV dimmer 0-100%
<b>F255</b>	010-255	Strobe speed from slow to fast
<b>CL01</b>	01-08	Static colour selectable
<b>CC01</b>	00-99	Colour jumping
<b>DE01</b>	00-99	Colour gradual change, speed from slow to fast
<b>CP01</b>	00-99	Colour pulse change, speed from slow to fast
<b>SUN9</b>	0-9	Sound control, sensitivity from high to low

## DMX CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dim all, From dark to bright
2	Colour	000-255	Red 0-100%, from dark to bright
3		000-255	Green 0-100%, from dark to bright
4		000-255	Blue 0-100%, from dark to bright
5		000-255	UV 0-100%, from dark to bright
6		Strobe	000-009
	010-255		Strobe from slow to fast
7	Function	000-050	No function
		051-100	8 kinds of colour output
		101-150	Colour jumping
		151-200	Colour gradual change
		201-250	Colour pulse change
		251-255	Sound control

# RJ45 TO DMX CABLE

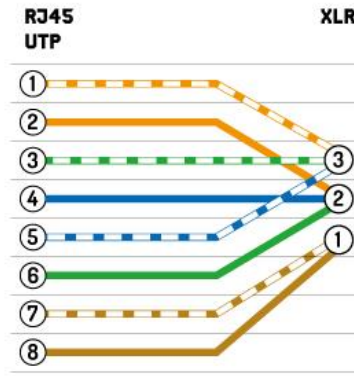



# BEAMZ

**YOUR FUTURE  
YOUR SKILLS  
YOUR PLATFORM  
YOUR PARTY  
YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

