



**BEAMZ**  
**MADE**  
**EAZY**

153.689 V1

**DJ BANK 244**

**QUICK START GUIDE**

## CONTROL MENU

MENU		DESCRIPTION
ADDR	19CH	Select DMX start address d001-d512
	16CH	
	7CH	
	4CH	
STAT	S01-19	Static colours
AUTO	Au 1-4	Auto program
SOND	So 1-4	Sound Program
SPED	SP 1-9	Speed
SENS	SE 1-9	MIC sensitivity
COLO	r000-255	Red (0-100%)
	g000-255	Green (0-100%)
	b000-255	Blue (0-100%)
	U000-255	White (0-100%)
DIMM	dl 1- dl 9	Master dimming
SILE	on/oFF	Silent scene by Sound program
SLAV	Slave	Slave
INFR	on/oFF	Enable or Disenable IR remote

## DMX CHANNELS


### 16 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	PAR 1	000-255	Red (0-100%)
2		000-255	Green (0-100%)
3		000-255	Blue (0-100%)
4		000-255	White (0-100%)
5	PAR 2	000-255	Red (0-100%)
6		000-255	Green (0-100%)
7		000-255	Blue (0-100%)
8		000-255	White (0-100%)
9	PAR 3	000-255	Red (0-100%)
10		000-255	Green (0-100%)
11		000-255	Blue (0-100%)
12		000-255	White (0-100%)
13	PAR 2	000-255	Red (0-100%)
14		000-255	Green (0-100%)
15		000-255	Blue (0-100%)
16		000-255	White (0-100%)

## 4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-255	Master dimming (0-100%)
2	Strobe	000-255	PAR Stroboscope (Rate 0-100%)
3	Colours	000-009	No function
		010-019	Red
		020-029	Green
		030-039	Blue
		040-049	White
		050-059	Yellow
		060-069	Magenta
		070-079	Cyan
		080-089	Dark orange
		090-099	Green yellow
		100-109	Salmon
		110-119	Turquoise
		120-129	Light Green
		130-139	Orange
		140-149	Straw
		150-159	Lavender
		160-169	Light blue
170-179	Dark blue		
180-189	Pink		
190-255	All on		
4	Mode	000-009	No function
		010-039	Auto program1 (rate)
		040-069	Auto program2 (rate)
		070-099	Auto program3 (rate)
		100-129	Auto program4 (rate)
		130-159	Sound program1 (rate)
		160-189	Sound program2 (rate)
		190-219	Sound program3 (rate)
		220-255	Sound program4 (rate)

## RIGGING

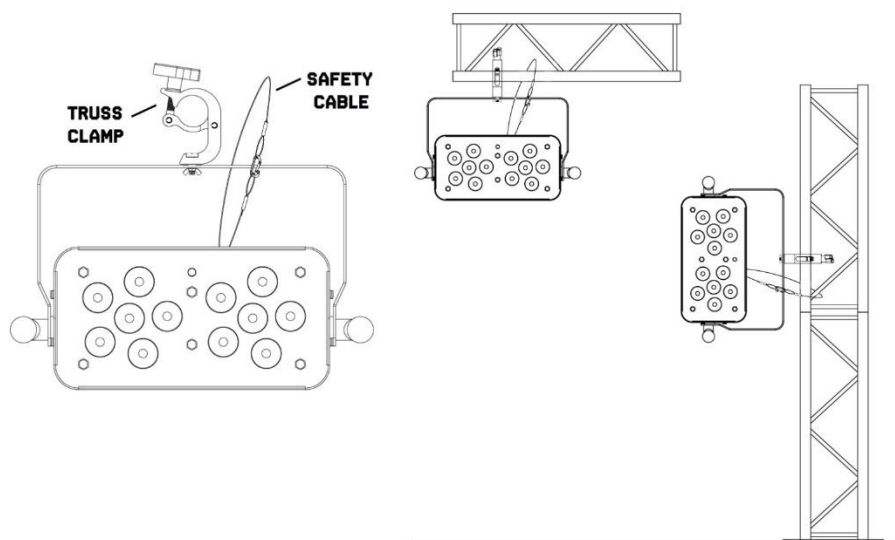



# BEAMZ

**YOUR FUTURE**  
**YOUR SKILLS**  
**YOUR PLATFORM**  
**YOUR PARTY**  
**YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

