



BEAMZ
MADE
EAZY


150.646_150.648 V1.3

ZEUS

QUICK START GUIDE

CONTROL MENU


If the display is in standby, unlock it:

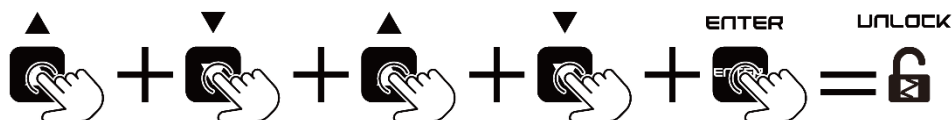

MENU		DESCRIPTION
ADDRESS	001-512	Address code mode
CHANNEL	4CHA	4A channel mode
	4CHB	4B channel mode
	5CH	5 channel mode
	6CHA	6A channel mode
	6CHB	6B channel mode
	7CH	7 channel mode
	12CH	12 channel mode
	40CH	40 channel mode
	80CH	80 channel mode
	160CH	160 channel mode
DMX FAIL	Hold	DMX512 data retention
	Blackout	DMX512 Data is not retained (black field)
DIMMER CURVE	Curve 1	Linear curve
	Curve 2	Square curve
	Curve 3	Logarithmic curve
	Curve 4	S-curve
CUSTOM	Red: 000-255	Red manual dimming
	Green: 000-255	Green manual dimming
	Blue: 000-255	Blue manual dimming
	C White: 000-255	Cool White manual dimming
	W White: 000-255	Warm White manual dimming
PROGRAM	COLOR	DIM:0-255
		Color:1-27
		Strobe:0-255
	Lee color	DIM: 0-255
		L101 / L102/ L105 /L106 /L107 /L110/ L111 /L115/ L116/ L118 /L119 /L121 /L124 /L126 /L127 /L128 /L132/ L135/ L139/ L147/ L151 /L152/ L158/ L164/ L174/ L179 /L180 /L201 /L203 /L204
		Strobe:0-255
	CCT	DIM:0-255
		2700K /3000K /3200K /3500K /3800K / 4100K /4400K /4700K /5000K/5300K /5600K /5900K /6200K / 6500K /6800K /7100K /7400K /7700K /8000K /8300K /8600K / 8900K /9200K /9500K /9800K /10000K/10500K/11000K/11500K/12000K
		G/M:-1.00--1.00
	HSI	DIM:0-255
		HUE:0-360
		STA:0-100
	AUTO	Auto Mode:0-68
		Speed:1-16
		Color:0-27
	SOUND	Sound mode: 0-3
		SENS: 1-100
		Color: 0-27
	Wifi	LED_XXX
MASTER/ SLAVE	Master / Slave	

WIRELESS DMX ON/OFF	On	RD Protocol	On/Off	Paring
				Clear
		GZ Protocol		Group ID: 1,2,3,4,5,6,7 Off
RUN TIME	1h/2h/3h/4h/5h/6h/7h/8h/9h/10h/11h/12h			
INFORMATION	Version xxx			
	Current Time 00H 00M 00S			
IR	ON / OFF			
MENU LOCK	ON / OFF			
BACK LIGHT	Always on /10s / 20s /30s			
FACTORY RESET	ON			
	YES			
Advanced parameter settings: (In A001 mode, press the confirm button for 3 seconds to enter)				
Red	000-255	Red current adjustment		
Green	000-255	Green current adjustment		
Blue	000-255	Blue current adjustment		
Cool White	000-255	Cool white current adjustment		
Warm White	000-255	Warm white current adjustment		
State	Single	Currently on		
	Whole	All bright		
T. Limit	060	Power reduction setting (OFF/function off, power reduction on/40-100 degree setting range)		
Delay	YES	Dimming delay on		
	NO	Dimming delay off		

REMOTE CONTROL

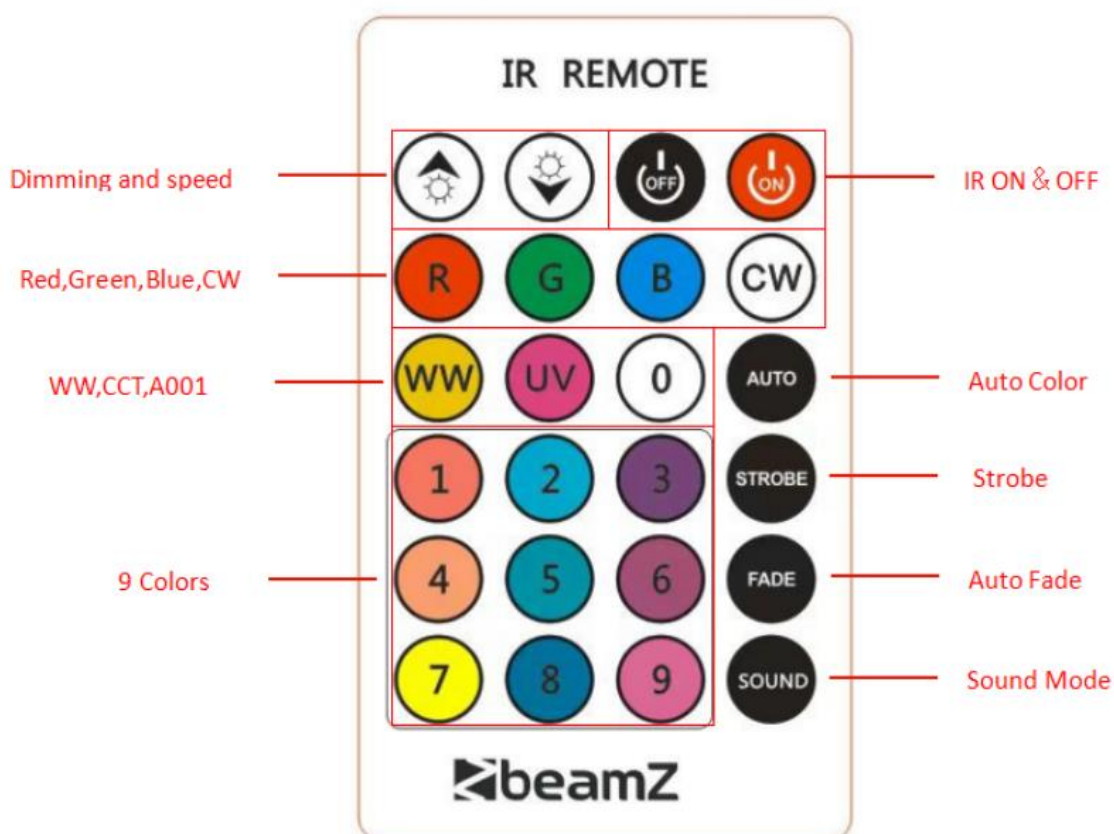




CAUTION! The remote control is supplied with a battery inserted. An insulating foil between the battery and the battery contacts prevents the battery from being discharged during storage. Prior to the first operation remove the foil from the battery support on the rear side of the remote control. Otherwise operation of the remote control is not possible.

If the range of the remote control decreases, replace the battery. For this purpose, on the rear side of the remote control press the small bar with the groove to the right (1) and at the same time remove the battery support (2).

For operation, one 3 V button cell type CR 2025 is required. When inserting, pay attention that the positive pole of the button cell shows upwards in the support.



DMX CHANNELS

4A CHANNELS

CHANNEL	VALUE	DESCRIPTION
1	000-255	Total dimming
2	000-010	No function
	011-255	Strobe
3	000-004	No function
	005-255	Color temperature
4	000-255	Tune GM

4B CHANNELS

CHANNEL	VALUE	DESCRIPTION
1	000-255	Total dimming
2	000-010	No function
	011-255	Strobe
3	000-004	No function
	005-255	Tune RGB mixed color
4	000-255	Color saturation

5 CHANNELS

CHANNEL	VALUE	DESCRIPTION
1	000-255	Red dimming
2	000-255	Green dimming
3	000-255	Blue dimming
4	000-255	Cool white dimming
5	000-255	Warm white dimming

6A CHANNELS

CHANNEL	VALUE	DESCRIPTION
1	000-255	Total dimming
2	000-010	No function
	011-255	Strobe
3	000-004	No function
	005-255	RGB mixed color
4	000-255	Color saturation
5	000-004	No function
	005-255	Color temperature
6	000-255	Tune GM

6B CHANNELS

CHANNEL	VALUE	DESCRIPTION
1	000-255	Total dimming
2	000-255	Red dimming
3	000-255	Green dimming
4	000-255	Blue dimming
5	000-255	Cool white dimming

6	000-255	Warm white dimming
---	---------	--------------------

7 CHANNELS

CHANNEL	VALUE	DESCRIPTION
1	000-255	Total dimming
2	000-010	No function
	011-255	Strobe
3	000-255	Red dimming
4	000-255	Green dimming
5	000-255	Blue dimming
6	000-255	Cool white dimming
7	000-255	Warm white dimming

12 CHANNELS

CHANNEL	VALUE	DESCRIPTION
1	000-255	Total dimming
2	000-010	No function
	011-255	Strobe
3	000-010	No function
	011-019	Red
	020-028	Green
	029-037	Blue
	038-046	Cool white
	047-055	Warm white
	056-064	Red + green
	065-073	Green + blue
	074-082	Red + blue
	083-091	Red + green
	092-100	Green + blue
	101-109	Red + warm white
	110-118	Red + green
	119-127	Green + blue
	128-136	Red + blue
	137-145	Blue + warm white
	146-154	Warm white + cool white
	155-163	Green + cool white
	164-172	Green + warm white
	173-181	Red + blue + cool white
	182-190	Red + warm white + coolwhite
	191-199	Green + blue + cool white
	200-208	Green + blue + warm white
	209-217	Blue + warm white + coolwhite
	218-226	Red + green + blue
	227-235	Red + green + blue + cool white
	236-244	Green + blue + cool white + warm white
	245-255	Red + green + blue + cool white + warm white
4	000-016	No function
	017-033	Background red
	034-050	Background green
	051-067	Background blue
	068-084	Background cool white
	085-101	Background warm white
	102-118	Background red + green

	119-135	Background green + blue
	136-152	Background red + blue
	153-169	Background red + green
	170-186	Background green + blue
	187-203	Background red + warm white
	204-220	Background red + green
	221-237	Background green + blue
	238-254	Background red + blue
	255	Background blue + warm white
5	000-001	No function
	002-255	Base tint
6	000-010	No function
	011-220	Effects (68 types, one effect with 3 values)
	221-255	No function
7	000-255	Effect speed
8	000-255	Red dimming
9	000-255	Green dimming
10	000-255	Blue dimming
11	000-255	Cool white dimming
12	000-255	Warm white dimming

40/80/160 CHANNELS

40CH	80CH	160CH	VALUE	DESCRIPTION
1	1	1	000-255	Red dimming 1 group
2	2	2	000-255	Green dimming 1 group
3	3	3	000-255	Blue dimming 1 group
4	4	4	000-255	Cool white dimming 1 group
5	5	5	000-255	Warm white dimming 1 group
6	6	6	000-255	Red dimming 2 group
7	7	7	000-255	Green dimming 2 group
8	8	8	000-255	Blue dimming 2 group
9	9	9	000-255	Cool white dimming 2 group
10	10	10	000-255	Warm white dimming 2 group
11	11	11	000-255	Red dimming 3 group
12	12	12	000-255	Green dimming 3 group
13	13	13	000-255	Blue dimming 3 group
14	14	14	000-255	Cool white dimming 3 group
15	15	15	000-255	Warm white dimming 3 group
16	16	16	000-255	Red dimming 4 group
17	17	17	000-255	Green dimming 4 group
18	18	18	000-255	Blue dimming 4 group
19	19	19	000-255	Cool white dimming 4 group
20	20	20	000-255	Warm white dimming 4 group
21	21	21	000-255	Red dimming 5 group
22	22	22	000-255	Green dimming 5 group
23	23	23	000-255	Blue dimming 5 group
24	24	24	000-255	Cool white dimming 5 group
25	25	25	000-255	Warm white dimming 5 group
26	26	26	000-255	Red dimming 6 group
27	27	27	000-255	Green dimming 6 group
28	28	28	000-255	Blue dimming 6 group
29	29	29	000-255	Cool white dimming 6 group
30	30	30	000-255	Warm white dimming 6 group

31	31	31	000-255	Red dimming 7 group
32	32	32	000-255	Green dimming 7 group
33	33	33	000-255	Blue dimming 7 group
34	34	34	000-255	Cool white dimming 7 group
35	35	35	000-255	Warm white dimming 7 group
36	36	36	000-255	Red dimming 8 group
37	37	37	000-255	Green dimming 8 group
38	38	38	000-255	Blue dimming 8 group
39	39	39	000-255	Cool white dimming 8 group
40	40	40	000-255	Warm white dimming 8 group
				
	76	76	000-255	Red dimming 16 group
	77	77	000-255	Green dimming 16 group
	78	78	000-255	Blue dimming 16 group
	79	79	000-255	Cool white dimming 16 group
	80	80	000-255	Warm white dimming 16 group
				
		156	000-255	Red dimming 32 group
		157	000-255	Green dimming 32 group
		158	000-255	Blue dimming 32 group
		159	000-255	Cool white dimming 32 group
		160	000-255	Warm white dimming 32 group



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.



BEAMZLIGHTING.COM